

913



SERVICES AVAILABLE

- EQUIPMENT DESIGN
- CUSTOM FABRICATION AND WELDING
- EQUIPMENT RE-MANUFACTURE
- CONTRACT MAINTENANCE - FLEET OF SERVICE TRUCKS (1 TO 3 TON)
- MAINTENANCE REPAIR CATERPILLAR / MINING/ PIPELINE
- PORTABLE LINE BORING WITH BOREWELDER FOR BUILD-UP

MINING SOLUTIONS THAT WORK FOR YOUR BUSINESS

- Project conceived through numerous consultations with the mine users.
- The engine powersystem was changed from a Caterpillar 3304 to a Mercedes MBE 904 operating at 174 HP @ 2200 rpm.
- This unit was originally equipped with a direct control hydraulic system, which was changed to hydraulic pilot and electro-hydraulic operation.
- The LHD included a quickdetach assembly, low profile bucket with pushplate, and enlarged operators compartment with orbitrol steering

Standard Equipment

- Donaldson dry type air filter assembly
- Catalytic exhaust purifier and muffler
- Wheel chocks mounted toward drivers-side
- Ergonomically designed operators compartment
- KAB 301 Seat and Suspension

Carrier

- EIMCO 913 LHD

Bucket

- 3 yard capacity

Engine

- Mercedes - Benz MBE904, 174 H.P. (130 kW)@ 2200 rpm

Transmission

- Clark 28000 Powershift Transmission with hydraulic mounted brake

Axles

- Clark - Planetary drive axle D-17500 with liquid cooled brakes

Torque Convertor

- Clark C270 series convertor

Wheels and Tires

- 17.5 X 25 certified rim and tire assemblies (GoodYear Unisteel)

Steering

- Closed center orbitrol steering with accumulator assist

Brakes

- Hydraulic internal wet disc brakes with isolated front and rear systems
- Push to apply park brake control with reset function
- Spring applied – hydraulic release parking brakes on transmission
- Front, rear and park pressure gauges

Tank capacities

- Hydraulic: 227 Litres
- Fuel: 212 Litres



Optional Features

- Various engine configurations (Cummins, Deutz..)
- Ansul checkfire fire suppression
- Certified ROPS / FOPS Canopy
- Steering (Stic or Orbitrol)
- Lincoln Quicklub® automatic lube for machine

Dimensions

- 61" High X 72" Wide X 289"

Weight


- 28500 lbs (Operating)

Turning Angle

- 2.6M Inside Turning Radius

Alpine Cutting Head

- TEREX-SCHAEFF WS45N Head
- Separate / independant hydraulic system designed to control heat and contamination.

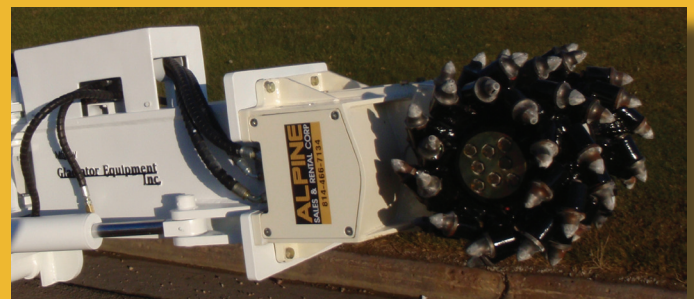

**Gladiator Equipment
Inc.**

6603 - 44 th Street, Leduc, Alberta, T9E7E5
TEL: (780) 980-7555 FAX: (780) 986-7051

EMAIL:sales@gladiatorequipment.com

Specifications are subject to change without notice.

*"heavy equipment
specialists"*