



HC109

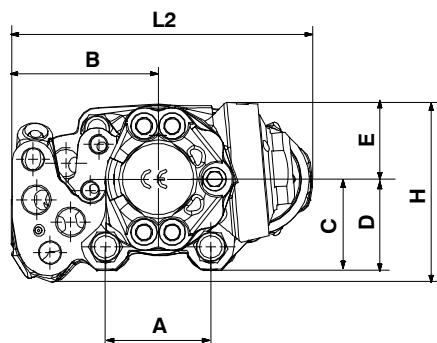

| | mm | in. |
|----|-----|------|
| L2 | 320 | 12.6 |
| A | 112 | 4.4 |
| B | 156 | 6.14 |
| C | 72 | 2.83 |
| D | 97 | 3.81 |
| E | 80 | 3.14 |
| H | 190 | 7.48 |

| Type | independent rotation | | | |
|--|----------------------|-------|-----------------------|-----------------------|
| Max. strike flow | l/mn | GPM | 135 | 36 |
| Max. strike pressure | bar | PSI | 135 | 1959 |
| Max. strike frequency with E piston | Hz | BPM | 47 | 2800 |
| Energy per blow | J | ft.lb | 400 | 295 |
| Max. rotation pressure | bar | PSI | 150 | 2177 |
| Rotation flow motor 024 (bit dia. \leq 64 mm) | l/mn | GPM | 30 | 8 |
| Rotation speed motor 024 | t/mn | RPM | 210 | 210 |
| Max. rotation torque motor 024 | Nm | ft.lb | 340 | 250 |
| Rotation flow motor 031 (bit dia. \leq 76 mm) | l/mn | GPM | 45 | 12 |
| Rotation speed motor 031 | t/mn | RPM | 230 | 230 |
| Max. rotation torque motor 031 | Nm | ft.lb | 440 | 324 |
| Rotation flow motor 043 (bit dia. \leq 76 mm) | l/mn | GPM | 60 | 16 |
| Rotation speed motor 043 | t/mn | RPM | 220 | 220 |
| Max. rotation torque motor 043 | Nm | ft.lb | 610 | 449 |
| Rotation flow motor 055 (bit dia. \leq 89 mm) | l/mn | GPM | 60 | 16 |
| Rotation speed motor 055 | t/mn | RPM | 175 | 175 |
| Max. rotation torque motor 055 | Nm | ft.lb | 780 | 574 |
| Drain flow approx. | l/mn | GPM | 8 | 2 |
| Water flushing pressure | bar | PSI | 10 to 12 | 145 to 174 |
| Water flushing flow | l/mn | GPM | 30 to 50 | 8 to 13 |
| Air flushing pressure | bar | PSI | 8 to 12 | 116 to 174 |
| Air flushing flow | m³/mn | CFM | 10 | 358 |
| Front guide lubrication pressure | bar | PSI | 3 | 44 |
| Front guide lubrication air flow | l/mn | GPM | 300 | 79 |
| Front guide lubrication oil | | | 6 drops/mn | 6 drops/mn |
| Weight | daN | lb | 142 | 313 |
| Rod diameter | mm | in. | 38 – 45 | 1"1/2 – 1"3/4 |
| Accu Nitrogen pressure HP | bar | PSI | 40 | 580 |
| Accu Nitrogen pressure LP | bar | PSI | 4 | 58 |
| Oil viscosity | cSt | cSt | ISO VG 32 / ISO VG 46 | ISO VG 32 / ISO VG 46 |
| Oil temperature | °C | °F | 40 to 60 | 104 to 140 |
| Air and water flushing temperature | °C | °F | 5 to 40 | 41 to 104 |
| Maximum required feed force | N | lbf | 15000 | 3372 |

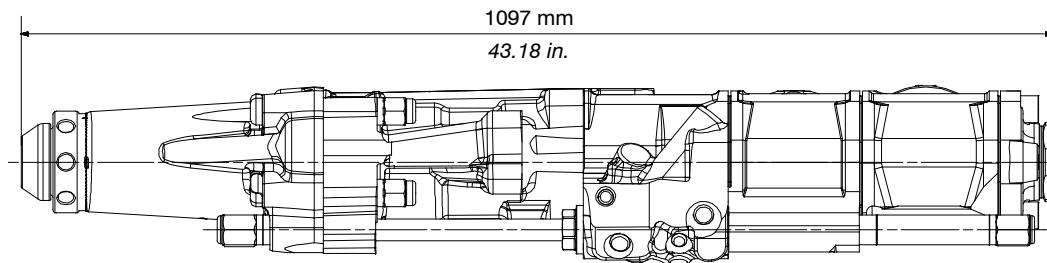

Please consult us before using specific oil (non-inflammable, biodegradable, ...).